

D Montageanweisung
 DK Installationsinstruktus
 ES Instrucciones de montaje
 F Instructions d'installation
 I Istruzioni di montaggio
 N Installationsinstruktioner
 NL Installatievoorschrift
 S Installation instruktioner
 FI Asennusohje

SSW2-1M Auxiliary Switch Kit for N05xx, N10xx Non-Spring Return Direct-Coupled Damper Actuators

INSTALLATION INSTRUCTIONS

0

**110/230 Vac,
 5 A resistive, 3 A inductive**

1

SWITCH PIN	WIRE NO.	WIRE COLOR
S1	1	BLACK, RED STRIPE
S2	2	BLACK, YELLOW STRIPE
S3	3	BLACK, BLUE STRIPE
S4	4	GRAY, RED STRIPE
S5	5	GRAY, YELLOW STRIPE
S6	6	GRAY, BLUE STRIPE

2

3

4

5

AS1


AS2

6 Setting AS1 (e.g. to 30°)


7

8 Result (6 + 7)



9 Setting AS2 (e.g. to 75°)

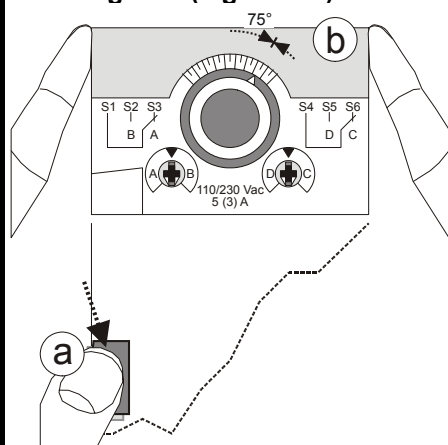


10

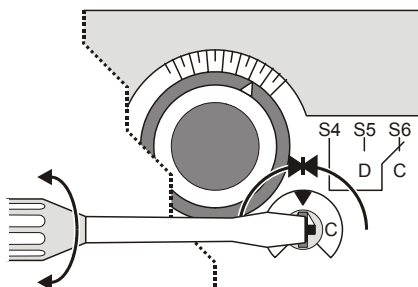

11 Result (9 + 10)

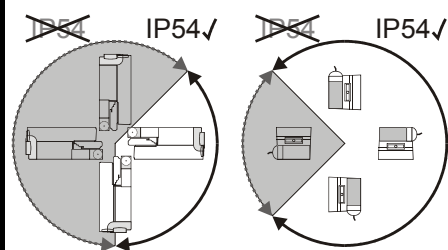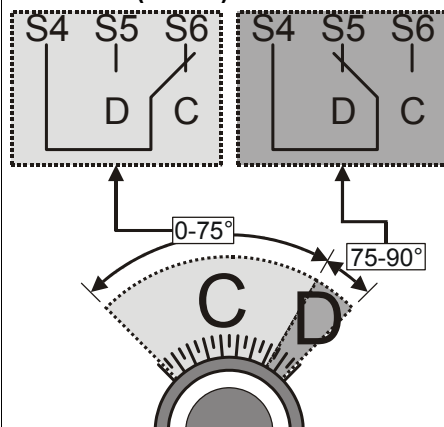

E	result	setting	e.g. to
D	Ergebnis	Einstellen	Z.B.auf
DK	resultat	justering	f. eks
ES	resultado	ajuste	e.g. en
F	résultat	ajustment	p.a. au
I	risultato	aggiustaggio	p.e. in
N	resultat	justering	f. eks
NL	resultat	instellen	b.v.
S	resultat	inställning	ex.
FI	tulos	asetta	esim

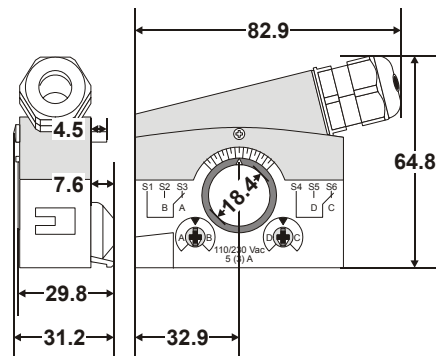

Automation and Control Solutions

Honeywell GmbH
 Böblinger Straße 17
 D-71101 Schönaich
 Phone: (49) 7031 63701
 Fax: (49) 7031 637493
<http://ecc.emea.honeywell.com>